

# FREIGHT ELEVATOR



## ▼ A loading giant that can release more and more cargo pressures for you


ALPHA freight lift serial fully utilizes the advanced and fully computerized contri technology. It employs the well-developed VVV Fcontrol system of ALPHA elevator. It is sample in structure and convenient in repair and maintenance. It fulfiles a qualitative leap in the aspects of the signal transmission and running control. It brings about the more stable ans reliable system, the lower noise, the smoother running, the more accurate leveling. It is more and more easy for the goods entry and exit. In addition, ALPHA freight lift serial can offer the micro-processor. The high speed running capabilities and expansion interface ensure to satisfy the special requirements from broad users.

## ▼ Light curtain protection

Several protective light curtains are formed at the entrance of the elevator, which sensibly detects and responses to any objects that intrude into the detecting scope. The safety of human and cargoes are guaranteed.

## ▼ The extremely humane operation

It is equipped with fully automatic collective selective function. It can fulfill operation with driver / without driver. The operation box specially and additionally sets door-shut delay" button in the operation box. Door-shut delay time can be flexibly adjusted at site according to the requirements. You feel more at case at loading and unloading the goods out of its humane setting.

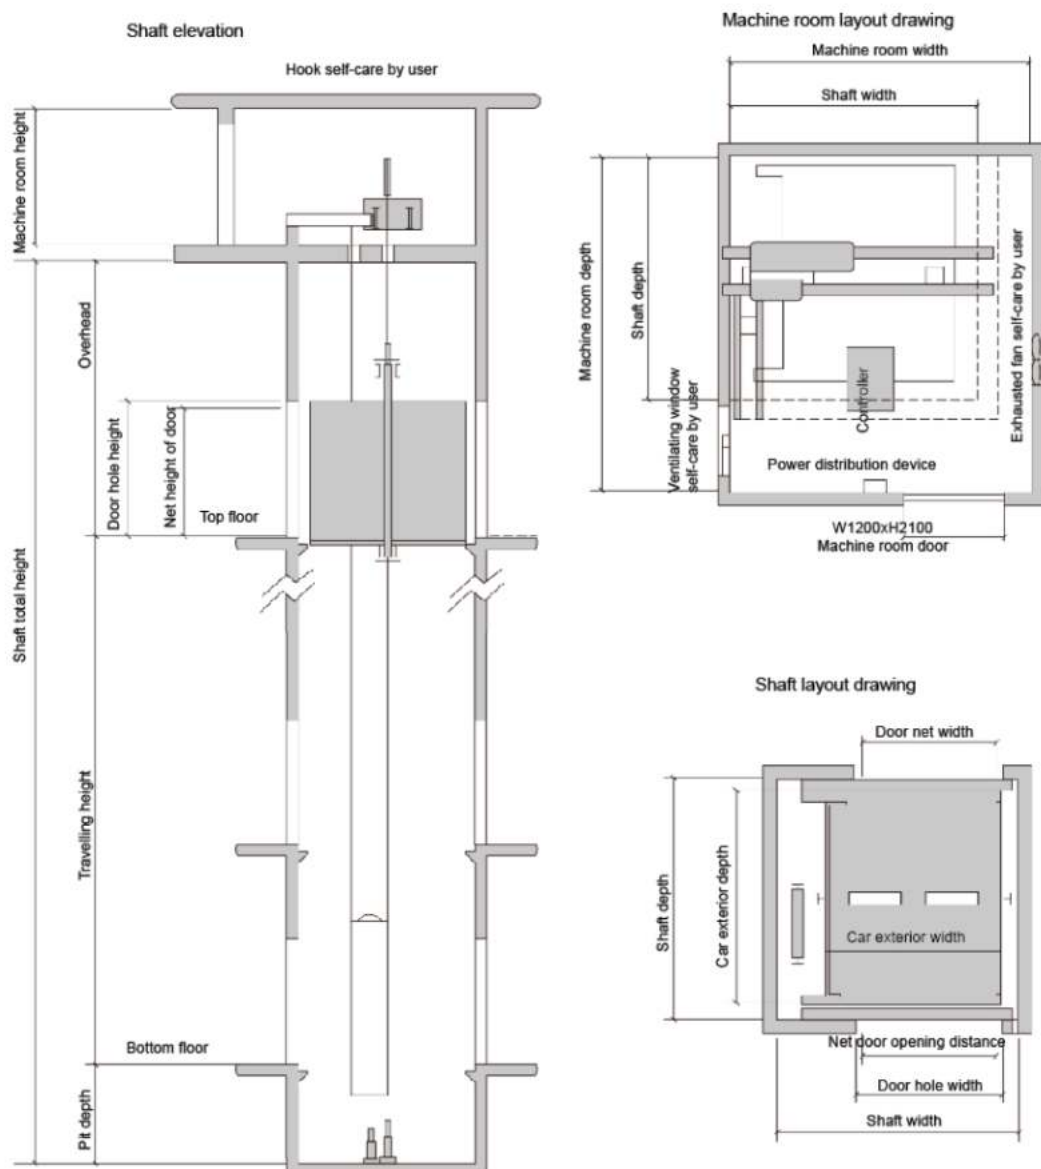

Freight elevator parameter table

Load (kg)	Speed (m/s)	Net size of car(mm)	Net size of door(mm)	Shaft net size(mm)			Machine room net size(mm)		Door open type
		C.WxC.DxD.H	D.WxD.H	width x depth	Overhead height	Pit depth	width x depth	height	
630	0.5	1200*1500*2200	1100*2100	2100*1860	4200	1500	2500*3000	2200	Two panel side opening
1000	0.5	1500*1800*2200	1200*2100	2250*2160	4200	1500	3000*3000	2200	Two panel side opening
2000	0.5	1570*2900*2200	1500*2100	2700*3260	4200	1500	3500*3000	2500	Two panel side opening
	1.0				4500	1500			Two panel side opening
	1.5	2000*2300*2200		2850*2660	4500	1600			Four panel center opening
	2.0				4800	1800			Four panel center opening
3000	0.25	2070*3050*2200	1800*2100	3300*3410	4500	1500	3800*4200	2500	Four panel center opening
	0.5								Four panel center opening
3200	1.0	2070*3100*2200	1800*2100	3300*3460	4500	1500	3800*4200	2500	Four panel center opening
5000	0.25	2800*3400*2500	2000*2200	4200*3800	5000	1600	4200*3800	2800	Four panel center opening
	0.5								Four panel center opening
7000	0.25	3000*4200*2500	2600*2400	4500*4600	5000	1600	4500*4600	2800	Four panel center opening
	0.5								Four panel center opening
10000	0.25	3070*5760*2500	2600*2400	4900*6200	5000	1600	4900*6200	2800	Four panel center opening